


SIEMA DI FISSAGGIO
FIXING SYSTEM

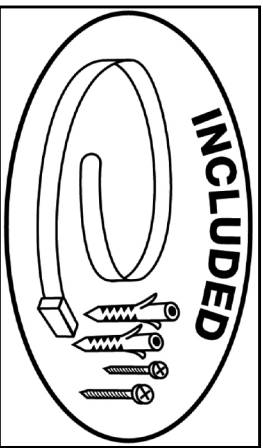

INCLUDED

ACCESSORI / ACCESSORIES

DATI TECNICI - TECHNICAL DATA

SCALA RANGE:	0 / 4,0°C
DIFFERENZIALE / DIFFERENTIAL:	4 ± 2°C
TOLL. VALORI F.S.	± 3°C
CAPILLARE / CAPILLARY:	MM 1500 RAME NICHELATO / NICKEL PLATED OR INOX CAPILLARY
INVOLUCRO / MANOPOLA / CASE:	LIGHT BLUE PANTONE 2995C
SERIGRAFIA / DIAL:	RED KNOB - WHITE NUMBERS
PORTATA CONTATTI / BREAKING CAPACITY:	C1 15(3)A 400 VAC C2 2,5(10,6)A 400VAC
MINIMUM CORRENT:	200 mA
INSULATION RESISTANCE:	> 100 M ohm
TEST DI VITA / LIFE OF PRODUCT:	100 000 CICLI / CYCLES
MAX °C SOPP. CORPO / MAX °C CASE	70°C
GRADO TENUTA / IP GRADE:	IP 4.0

MODIFICA	DOC RIF	DATA	APPARECCHIO ASSIEME PARTICOLARE	DESIGNATO A. SALA	APPROVATO SALA A.
1			ARTH096	1 - 1	11/11/2011
2			MATERIALE		
3			TRATTAMENTO		
4			NOTE		
5					



ARTH096