



Wiring diagram:

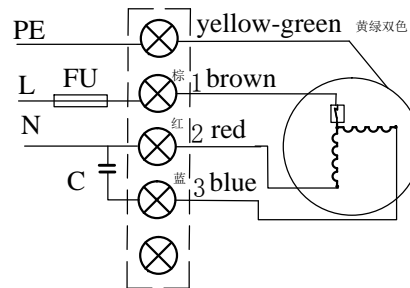

Technical specification:

- All parts of fan should be properly assembled, no oil or dirt on the surface, no obvious distortion, mechanical damage and other defects.
- Fan rotation is flexible, no delay, no operation sound, no scratch and other undesirable phenomena.
- The safety requirement of fan is performed according to GB12350-2009, the electrical strength is 1500Vmin, and the insulation resistance is not less than 100M at room temperature.
- Motor insulation class, F CLASS.
- Motor protection level, IP54, fan protection level, IP2X.
- The fan balance level is: $930 \pm 10\%$ r/min high than G6.3, vibration value is less than 5.4mm/s.

Nameplate:




Product model	YDWF102L60P6-675N-600 S
product type	External rotor axial flow fan
customer	以色列DAYAN
Product number
certification	CE、CCC

Condition of use:

- voltage and frequency: $1 \sim 230 \text{ V} \pm 5\% \cdot 50 \text{ Hz}$.
- Lead cable: Terminal block, the recommended standard of lead wire is not less than 0.75 mm^2 .
- Installation position: vertical or upward.
- ambient temperature: $-40 \sim 85^\circ\text{C}$.

The external wiring diagram:

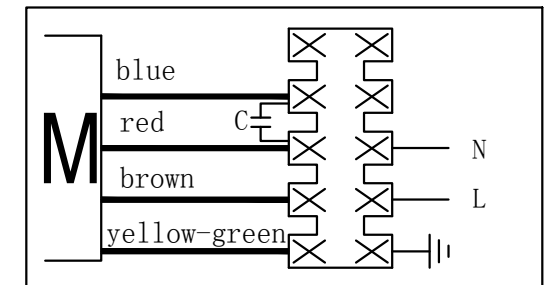

Test data at free :

connection	UAC (V) $\pm 5\%$	F (Hz)	P1 (W) $\pm 10\%$	I (A) $\pm 10\%$	n (r/min) $\pm 10\%$	Noise dB(A)
	1~230	50	410	1.90	930	69

	The signature	(date) (month) (year)	Product Specification
state	Deliver before		
	Not to estimate		
drawing			
audit			
approval			