


50Hz

6MI-40X

R404A Dew Point

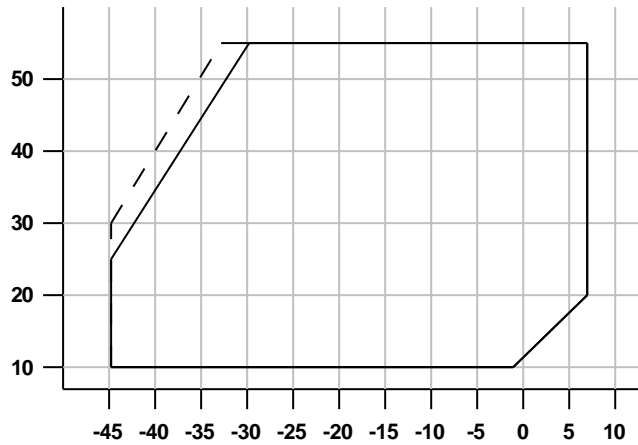

Minimum evaporating temp. with:
 ——— 25°C Suction Gas Return
 - - - 0°C Suction Gas Return

Suction Return Temperature 20.0°C

Evaporating Temperature °C

Liquid subcooling 0.0K

Cond °C	Capacity kW											
	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	5	7
10	20.20	26.70	34.70	44.40	56.10	70.00	86.20	105.00	126.50			
20	17.20	23.30	30.70	39.60	50.20	62.70	77.30	94.20	113.50	135.50	161.00	171.50
25	15.55	21.50	28.60	37.00	47.10	58.80	72.60	88.60	107.00	128.00	151.50	162.00
30		19.65	26.40	34.40	43.80	54.90	67.80	82.80	100.00	119.50	142.00	152.00
35		17.75	24.20	31.70	40.50	50.80	62.90	76.90	93.00	111.50	132.50	141.50
40			21.90	28.90	37.10	46.70	57.80	70.80	85.80	103.00	122.50	131.00
45			19.55	26.00	33.60	42.40	52.70	64.60	78.50	94.40	112.50	120.50
50				23.10	30.10	38.10	47.50	58.40	71.00	85.60	102.50	109.50
55				20.20	26.50	33.70	42.20	52.00	63.50	76.80	92.10	98.80
	Power Input kW											
	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	5	7
10	9.65	11.00	12.20	13.30	14.25	14.95	15.35	15.55	15.35			
20	10.15	11.85	13.50	15.00	16.40	17.60	18.60	19.30	19.70	19.80	19.50	19.30
25	10.25	12.15	14.00	15.75	17.40	18.85	20.10	21.10	21.80	22.20	22.30	22.20
30		12.40	14.45	16.45	18.30	20.00	21.50	22.80	23.80	24.60	24.90	25.00
35		12.60	14.85	17.05	19.15	21.10	22.90	24.50	25.80	26.80	27.50	27.70
40			15.20	17.60	19.95	22.20	24.20	26.10	27.70	29.10	30.10	30.40
45			15.40	18.05	20.70	23.10	25.50	27.60	29.50	31.20	32.60	33.00
50				18.45	21.30	24.00	26.60	29.10	31.30	33.30	35.00	35.60
55				18.80	21.90	24.90	27.70	30.50	33.00	35.30	37.40	38.10
	Current 400V, A											
	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	5	7
10	28.62	29.75	30.90	31.99	32.97	33.75	34.27	34.45	34.24			
20	29.03	30.55	32.15	33.75	35.27	36.66	37.84	38.73	39.27	39.39	39.02	38.71
25	29.12	30.87	32.71	34.59	36.42	38.13	39.66	40.93	41.88	42.43	42.51	42.39
30		31.10	33.21	35.38	37.53	39.58	41.48	43.15	44.52	45.52	46.07	46.15
35		31.23	33.62	36.10	38.58	41.00	43.29	45.37	47.18	48.64	49.68	49.96
40			33.93	36.73	39.57	42.37	45.06	47.57	49.83	51.77	53.31	53.81
45			34.11	37.26	40.46	43.66	46.77	49.72	52.45	54.89	56.96	57.67
50				37.66	41.25	44.85	48.40	51.82	55.04	57.99	60.60	61.53
55				37.92	41.91	45.94	49.94	53.83	57.56	61.04	64.21	65.37
	Mass Flow g/s											
	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	5	7
10	12.50	148.50	194.00	249.00	316.00	395.00	490.00	601.00	730.00			
20	104.00	141.00	187.00	242.00	308.00	386.00	479.00	589.00	716.00	865.00	1040.00	1115.00
25	98.50	136.50	182.00	237.00	302.00	380.00	472.00	581.00	708.00	856.00	1030.00	1105.00
30		131.00	177.00	231.00	296.00	373.00	465.00	572.00	698.00	845.00	1015.00	1095.00
35		125.00	171.00	225.00	289.00	366.00	456.00	562.00	687.00	833.00	1005.00	1080.00
40			164.00	218.00	281.00	357.00	446.00	551.00	675.00	820.00	992.00	1070.00
45			157.00	210.00	273.00	347.00	434.00	538.00	661.00	807.00	978.00	1055.00
50				201.00	263.00	336.00	422.00	525.00	647.00	792.00	965.00	1045.00
55				192.00	252.00	324.00	409.00	511.00	633.00	778.00	952.00	1030.00

50Hz

6MI-40X

R404A Dew Point

DWM Copeland - Compressor - Stream - Standard

COMPRESSOR MECHANICAL AND PHYSICAL DATA

Number of cylinders	6
Displacement @ 50 Hz, cu.m/h	120.5
Bore/Stroke, mm	71.5/57.5
Length/Width, mm	695/547
Height, mm	450
Net Weight, kg	219
Suction, inch	2 1/8
Discharge, inch	1 3/8
Oil Quantity, l	3.3
Base mounting (hole dia), mm	381 x 305 (18.0)
Sound Pressure @ 1m (LT), dBA	78
Sound Pressure @ 1m (MT), dBA	72
Sound Power (LT), dBA	89
Sound Power (MT), dBA	83
Sound Power with Sound Shell (LT), dBA	74
Sound Power with Sound Shell (MT), dBA	70
High Side PS, bar(g)	28
Low Side PS, bar(g)	22.5

COMPRESSOR ELECTRICAL DATA (380/420V - 3~ - 50Hz)

Maximum Operating Current, A	71.4
Locked Rotor Current, A	304
Default Enclosure Class	IP 54 (IEC 34)

ACCESSORIES INCLUDED

Mounting Parts	Spring
CoreSense Diagnostics	Oil pressure, motor and discharge line temperature protection; adv

ACCESSORIES OPTIONAL

Additional Cooling	70 W Vertical Air Flow Fan
Capacity Control	Capacity Steps 67/33 %
Crankcase Heater	100 W Internal
Adapter Kit	For Parallel Operation
Check Valve (NRV)	For unloaded start operation
Sound Attenuation	Sound Shell
Inverter	Control Techniques SK 4402
Mounting Parts	Rubber
Digital Modulation	33-100 %
Discharge Shut-off	Angle valve

MOTOR OPTIONS

Power Supply	Nominal Voltage	Motor Code	Start Connection	DOL Connection	Amps Factor
380-420 V/3~/50H	400	AWM	YY/Y	Y	1.00
220-240 V/3~/50H	230	EWL	Y/DELTA	DELTA	1.73
380-420 V/3~/50H	400	EWL		Y	1.00
380-420 V/3~/50H	400	EWM	Y/DELTA	DELTA	1.00
220-240 V/3~/50H	230	AWR	YY/Y	Y	1.73
500-550 V/3~/50H	525	AWY	YY/Y	Y	0.76
220-240 V/3~/60H	230	EWK	Y/DELTA	DELTA	2.09
380-420 V/3~/60H	380	EWK		Y	1.20
440-480 V/3~/60H	460	EWD	Y/DELTA	DELTA	1.00
208-230 V/3~/60H	230	AWC	YY/Y	Y	2.19
380 V/3~/60Hz	380	AWX	YY/Y	Y	1.20
440-480 V/3~/60H	460	AWD	YY/Y	Y	1.00